
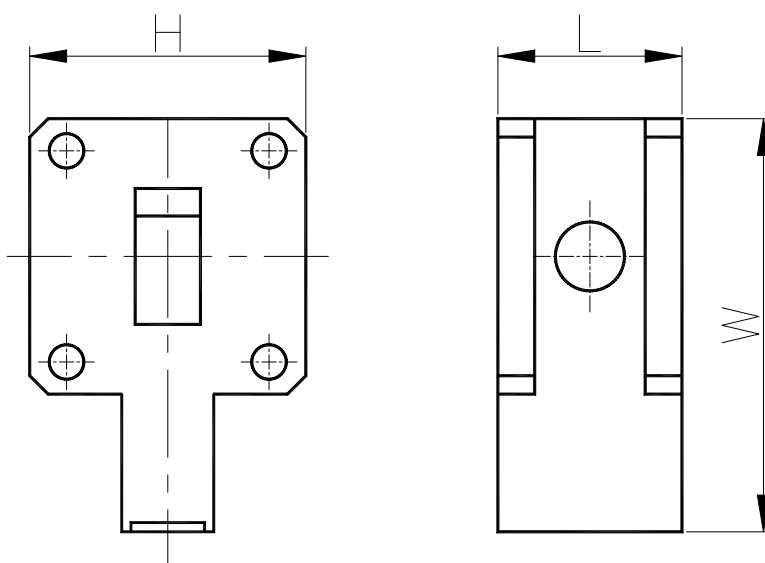



## 10.0-15.0GHz Waveguide Isolator

BG2552-WR75

Outline Drawing (mm):



Order Examples:

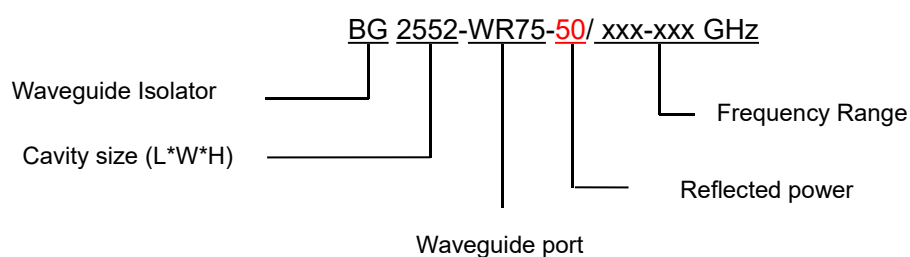

Basic Specifications:

|                |                                   |
|----------------|-----------------------------------|
| Impedance      | 50 $\Omega$                       |
| Connector Type | WR75                              |
| Size(mm)       | 52*25*38 (As shown in the figure) |
| Operating Temp | -40~+80 $^{\circ}\text{C}$        |



## Specifications:

| Model No.<br>(X=1: →Clockwise)<br>(X=2: ←Anticlockwise) | Freq. Range<br>GHz | bandwidth | IL.<br>dB (max) | Isolation<br>dB (min) | VSWR<br>(max) |
|---------------------------------------------------------|--------------------|-----------|-----------------|-----------------------|---------------|
| BG2552-WR75/10.0-15.0GHz                                | 10.0-15.0          | 5%        | 0.25            | 25.0                  | 1.15          |
|                                                         |                    | 10%       | 0.30            | 23.0                  | 1.20          |

## Instructions:

1, If you do not have the frequency you want, please contact us!