




Waveguide Isolator

◆Specifications

01	Model	BG6658-WR112-100-1/ 7.9-8.5GHz (→clockwise) BG6658-WR112-100-2/7.9-8.5GHz (←anticlockwise)
02	Frequency Range	18-26.5 GHz
03	Insertion Loss (max)	0.2 dB
04	Isolation (min)	20 dB
05	VSWR (max)	1.20
06	Forward Power (max)	100 W CW
07	Reverse Power (max)	20 W
08	Connector Type	WR112

◆Outline Drawing(Unit: mm)

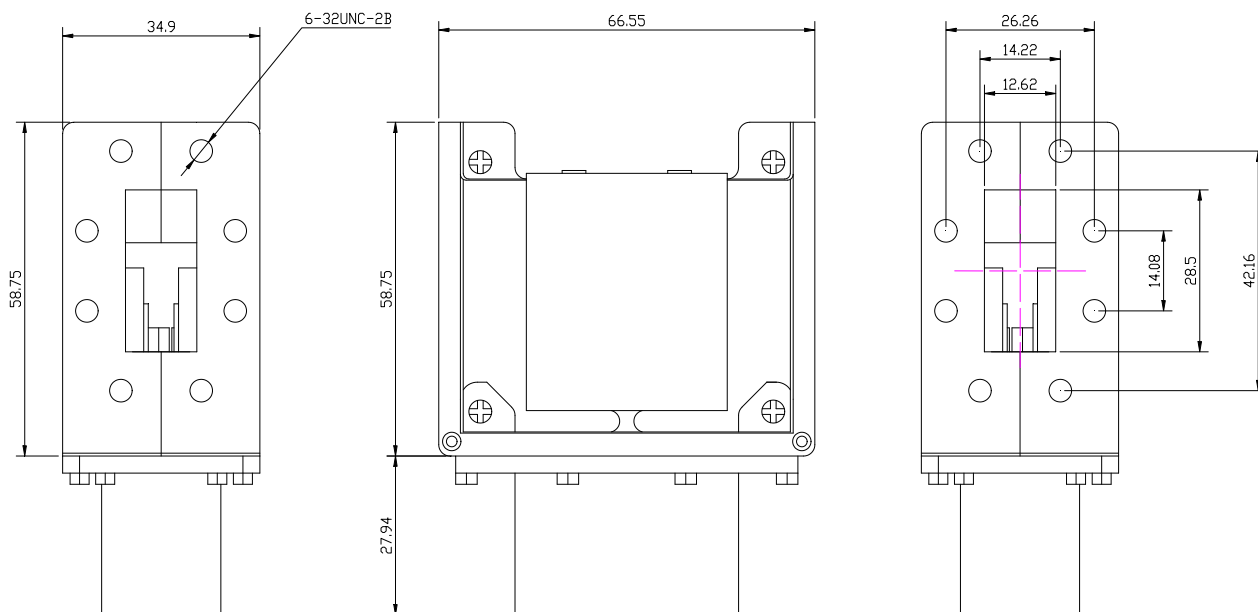

Unit: mm, General part tolerance is $\pm 2\%$ unless otherwise stated

Sichuan TYT Technology Co., Ltd.

E-mail:sales@rftyt.ru

677# Tangfang Road, Jingkai Dist, Mianyang City, Sichuan Province China