


1.5 to 3.0GHz Coaxial Isolator

TG4040AS SMA Type

Outline Drawing (mm):

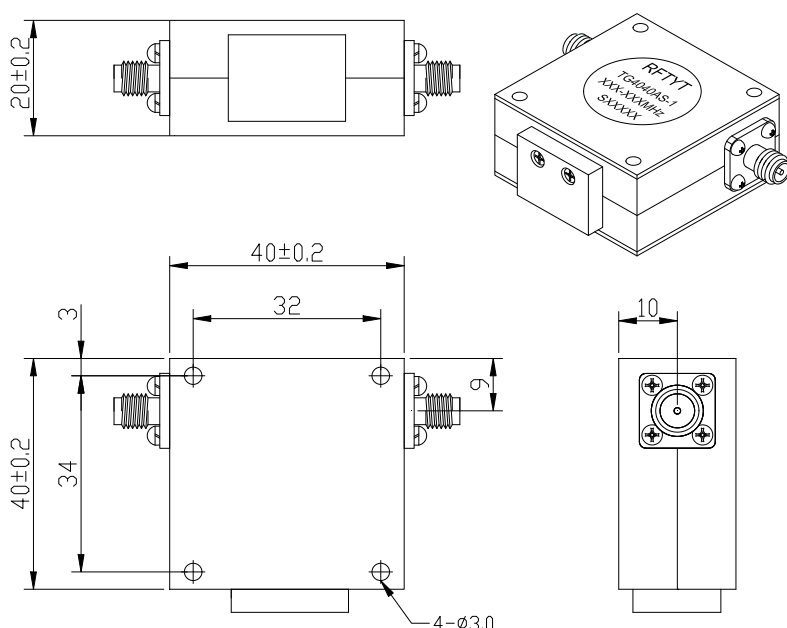

Features:

- ✧ Good temperature stability
- ✧ Withstand high power
- ✧ RoHS compliant
- ✧ Weight : ≈ 170 g


Material list:

- ✧ Cavity: aluminum conductive oxidation
- ✧ Outer shell: industrial pure iron nickel plating
- ✧ Guide body: Silver plated brass
Coating: Silver
- ✧ Load chamber: aluminum conductive oxidation

Application:

- ✧ RF amplifier final stage, protect the amplifier
- ✧ Digital communications, satellite communications
- ✧ GSM/CDMA/TD-SCDMA/WCDMA
EGSM/Wimax/TD-LTE/AMPS/SMR
5G and other communication systems

Order Examples:

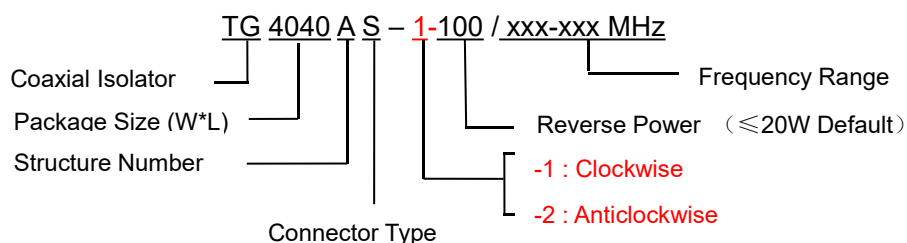

Connector Type:

SMA Type Connector Options			N Type Connector Options		
Port 1	Port 2	Abbreviation	Port 1	Port 2	Abbreviation
SMA-F	SMA-F	S	N-F	N-F	N
SMA-F	SMA-M	SKJ	N-F	N-M	NKJ
SMA-M	SMA-F	SJK	N-	N-F	NJK
SMA-M	SMA-M	SJ	N-M	N-M	NJ


Basic Specifications:

Impedance	50 Ω
Connector Type	SMA-F
Size(mm)	40.0*40.0*20.0
Operating Temp	-10~+60℃
Storage temperature	-50~+90℃

Specifications:

Model No. (X=1: →Clockwise) (X=2: ←Anticlockwise)	Freq. Range GHz	IL. dB (max)	Isolation dB (min)	VSWR	Forward Power CW	Reverse Power W
TG4040AS-X/1.5-3.0GHz	1.5-3.0	0.60	17.0	1.35	100	20/100
TG4040AS-X/1.7-2.7GHz	1.7-2.7	0.50	18.0	1.30	100	20/100
TG4040AS-X/1.8-2.7GHz	1.8-2.7	0.50	18.0	1.30	100	20/100
TG4040AS-X/1.8-3.6GHz	1.8-3.6	0.60	17.0	1.35	100	20/100

Reflected power 100W size diagram

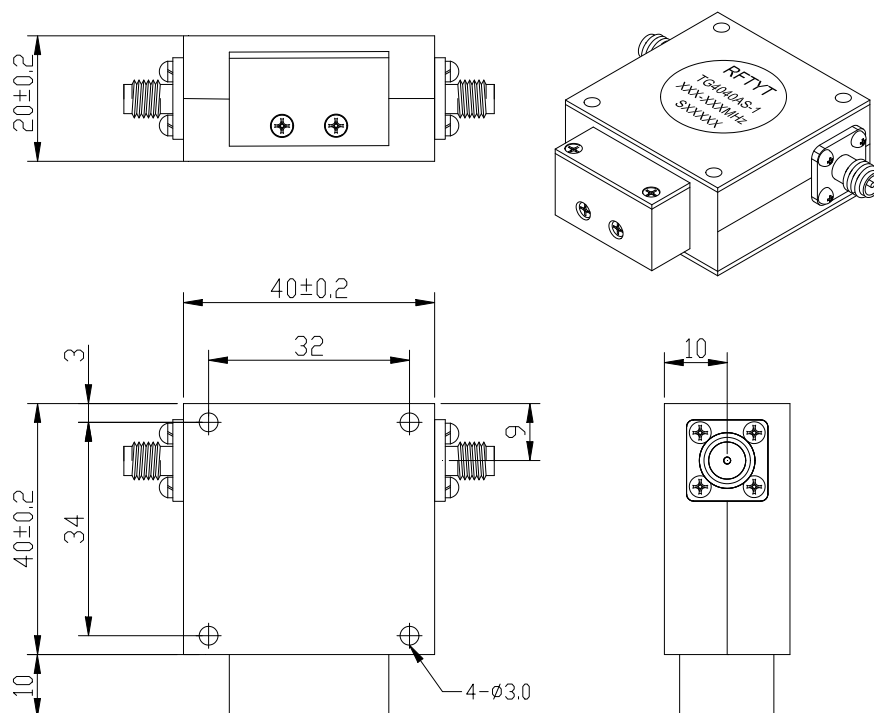

The reflected power of this figure is 100W, the specifications are the same as the table, model **TG4040AS-X-100/XXX-XXXMHz**

Instructions:



- 1, the isolator connector can be selected SMA, N, male and female head can be used with the user;
- 2, the reflection power is commonly used 20W and 100W options, you can also configure the total reflection power according to user requirements;
- 3, only some common frequencies in the table, can be produced according to the user's requirements;
- 4, if you do not find what you are looking for, please contact us!