
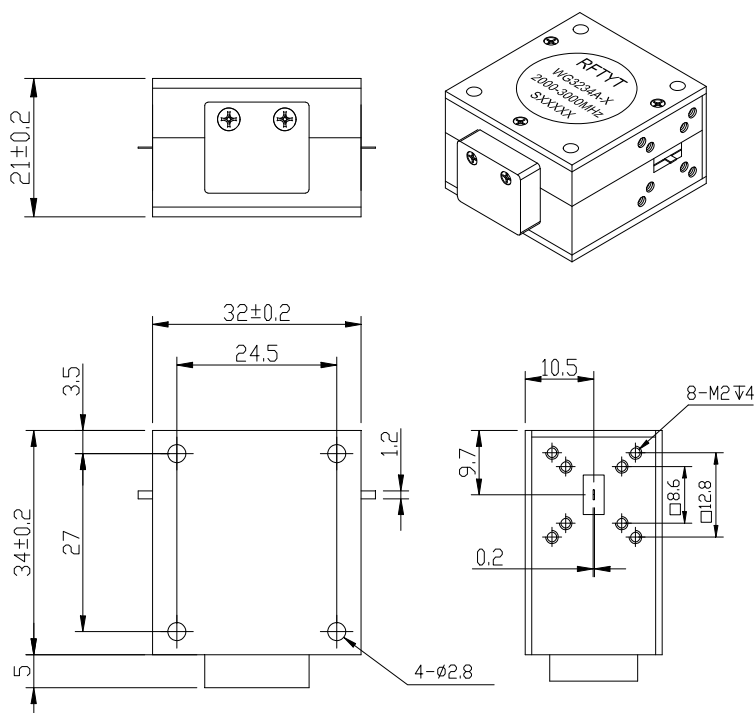


2.0 to 4.0GHz Drop in Isolator

WG3234B Drop-In Type

Outline Drawing (mm):



Features:

- ✧ Good temperature stability
- ✧ Withstand high power
- ✧ RoHS compliant
- ✧ Weight : ≈100 g


Material list:

- ✧ Shell: Steel
- Coating: Bright Nickel
- ✧ Inner conductor: Brass
- Coating: Silver

Application:

- ✧ Protect the power amplifier and
Installed at the end of RF power
amplifier
- ✧ Transceiver common antenna
- ✧ GSM1800/CDMA/TD-SCDMA/WCD
MA/EGSM/Wimax/TD-LTE/AMPS/S
MR 5G and other communication
systems

Order Examples:

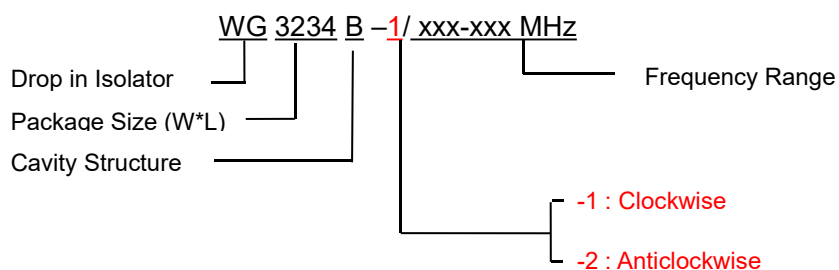


Basic Specifications:

Impedance	50 Ω
Size(mm)	32.0*34.0*21.0
Operating Temp	-10~+60℃
Storage temperature	-50~+90℃

Specifications:

Model No. (X=1: →Clockwise) (X=2: ←Anticlockwise)	Freq. Range GHz	IL. dB (max)	Isolation dB (min)	VSWR	Forward Power CW	Reverse Power W
WG3234B-X/2000-3000MHz	2.0-3.0	0.40	18.0	1.30	150	20/100
WG3234B-X/2000-3500MHz	2.0-3.5	0.40	18.0	1.30	150	20/100
WG3234B-X/2000-4000MHz	2.0-4.0	0.50	18.0	1.30	150	20/100
WG3234B-X/2500-3500MHz	2.5-3.5	0.40	20.0	1.25	150	20/100
WG3234B-X/2500-4000MHz	2.5-4.0	0.40	18.0	1.30	150	20/100

**If the frequency range you need is not covered in the form.
Please contact us for details.**

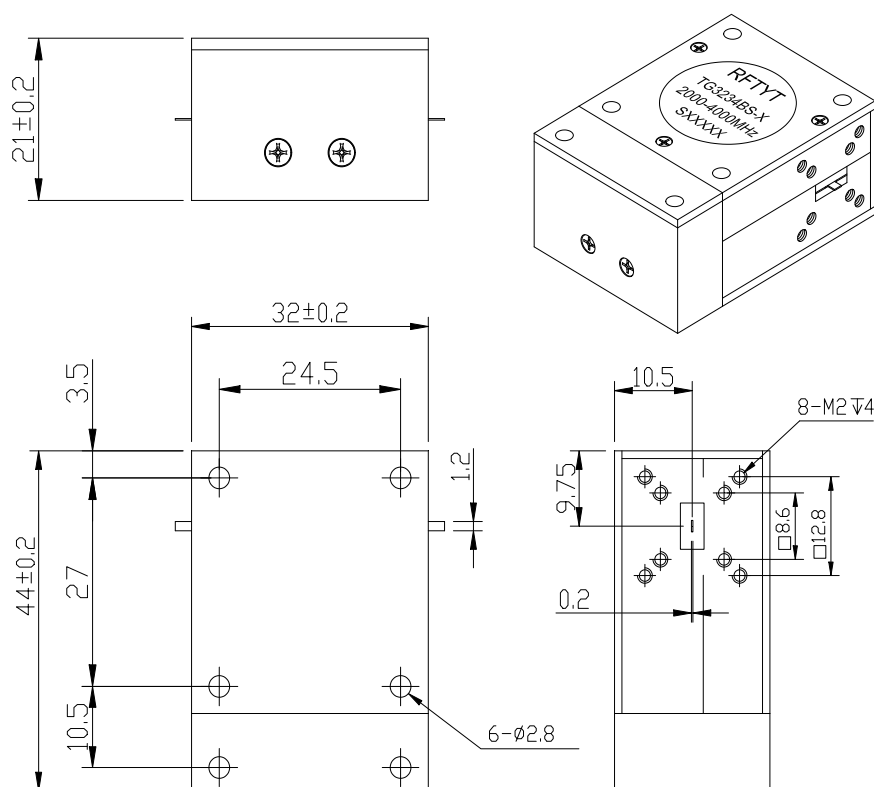

100W Reverse Power type

The specs are shown in the table above, and the model would be WG3234B-X-100/XXX-XXXMHz